



不锈钢电阻柜 (SRA)

SUS Resistor Assemblies

■ 产品概述 (Product Introduction)

可用在变频器控制电机减速和制动的电路中，通常外接电阻器可以将来自电动机和负载的多余能量消耗掉，以保护变频器的过压保护。在工业系统中，变频器制动电阻被广泛应用于电机启动制动调速、变频器制动、起吊行业大型机械制动、物料输送机构制动等领域。它们可以短时断续周期和持续的工作。


usable in a circuit of inverter to control the motor deceleration and braking. Usually an external resistor can consume the excess energy from the motor and load to protect the overvoltage crowbar of the inverter. In industrial systems, the inverter braking resistors are widely used in the fields of motor starting, braking and speed regulating, inverter braking, inverter braking, braking of large lifting machinery, braking of material handling mechanisms, etc. They can run both in short-term intermittent cycles and continuous cycles.

电流范围 Current Range: 10-1000A
电压范围 Voltage Range: 220-1140V

■ 执行标准 (Applicable Standards)

GB/T5729-1994 Fixed resistor used in electronic equipment

■ 产品尺寸图 (Product Size)

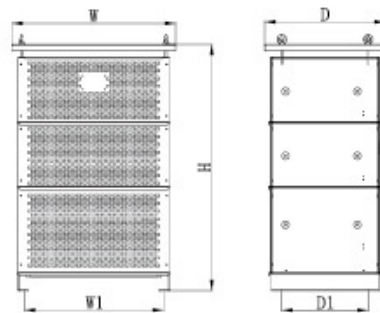

规格 Type	功率(KW) Power	尺寸Dimension (±1mm)				
		W	D	H	W1	D1
SRA	5	450	500	481	394	440
SRA	10	760	560	542	644	400
SRA	20	760	560	842	644	400
SRA	30	760	560	1140	644	400
SRA	40	760	560	1440	644	400
SRA	50	760	560	1740	644	400
SRA	60-80KW	880	760	1580	764	600
SRA	85-104KW	880	760	1930	764	600

备注：其他规格尺寸，可根据用户要求制造。
Remark: Dimension can be customization

■ 成品识别码 (Product Identification Code)

SRA	—	6KW	—	20R	—	J
不锈钢电阻箱 SUS Resistor Assemblies		额定功率 Rated Power		电阻阻值 Resistance Value		阻值误差 Resistance Tolerance H=±3% J=±5% K=±10%